


INSTRUFIBER

Fibra Óptica Cabo Rede Instrumentação Energia Ferramenta

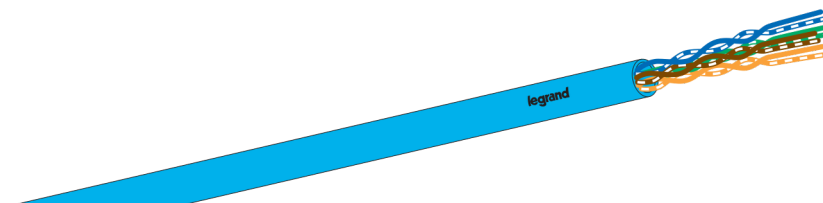


1. USE

Cable for high-speed VDI transmission networks

802.3 bt PoE++ up to type 4 applications compatible according to installation standards ISO/IEC 14763-2 : 2019 and EN 50174-2 : 2018

2. DESCRIPTION

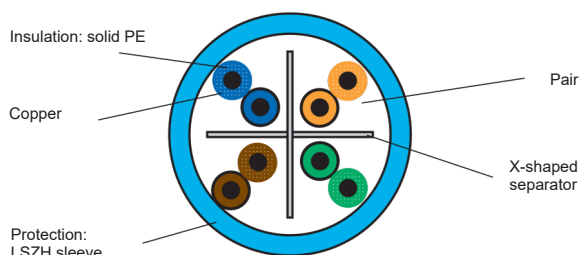

MARKING AND PACKAGING

Marking of Legrand cables

- LEGRAND
- Catalogue number
- Number of pairs
- Gauge
- Type
- Impedance
- Type of sleeve
- Category
- Conformity to standards
- EUROCLASS
- Velocity of propagation
- Traceability
- Measurement (remaining length in metres).

Complementary marking (on label)

- Designation
- Made in....

3.PERFORMANCEAT250MHZ (STAND. ANSI/TIA 568.2-D)

Reference	0 327 54
Maximum attenuation (dB/100 m)	32,8
Minimum NEXT (dB)	38,
PS NEXT (dB)	3
ACRF (dB / 100 m)	36,
PS ACRF (dB / 100 m)	3
Return Loss (dB)	19,

4. TECHNICAL AND MECHANICAL FEATURES

Catalogue number	0 327 54
Type	U/UTP
Type of sleeve	LSZH
Number of pairs	4
Assembly	Pairs
Diameter over insulation (mm)	0,99 ± 0,04
Average nominal diameter of the cable (mm)	5,8 ± 0,4
Weight of cable (kg/k m)	37 to 43
Min. bending radius when laying (mm)	25
AWG gauge*	23

*According to UL444ed.3 table 4

5. ELECTRICAL FEATURES AT 20°C

Catalogue number	0 327 54
Type	U/UTP
Maximum linear resistance (ohm/k m)	95 *
DC dielectric strength	1 KV / 1 min *
Minimum insulation resistance (Mohm.km)	5000
Minimum propagation speed	66 %
Characteristic impedance at 100 MHz	100 ±5Ω

* According to standard IEC 61156-5

6. ORDERING INFORMATION

Catalogue number	0 327 54
Type	U/UTP
Colour	Blue RAL 5015
Pack (m)	305
Packaging	Box

7. ENVIRONMENTAL FEATURES

Transport and storage temperature: -20 at + 60 °C

Storage temperature before installation: 10°C during 24h (if stock ≤ 5°C)

Usage temperature: - 20 to + 60 °C

Fire rating: EN 50399, IEC 60332-1-2, EN 60332-1-2

Smoke density : IEC 61034-2, EN 61034-2

Toxicity of fire effluent : IEC 60754-2, EN 60754-2

EUROCLASS EN 13501-6 = Class Dca s2d2a1

Also compliant with Eca

8. STANDARDS AND APPROVALS

Cat 6, 250 MHz

Electrical performances and characteristics :

- ANSI/TIA 568.2-D

- EN 50173-1

- EN 50288-6-1

- ISO/IEC 11801 (ed. 2.2)

- IEC 61156-5

IEEE 802.3bt : PoE++