

SR30-M2-D1

Digital Class A pyranometer with heating and tilt sensor

Introduced in 2017, SR30 is now the market leading Class A pyranometer for PV system performance monitoring. It is employed where the highest measurement accuracy is required.

- the first pyranometer compliant in its standard configuration with the IEC 61724-1 Class A requirements
- heated for best data availability: RVH™ technology outperforms traditional pyranometer ventilation
- lowest total cost of ownership: supported by a worldwide calibration organisation
- calibrated tilt sensor complying with IEC 61724-1 requirements for single-axis tracker monitoring
- spectrally flat: WMO compliant, also suitable for Plane of Array, diffuse, and albedo measurement



compliant with IEC
61724-1 Class A

with
heating

calibrated
tilt sensor

Figure 1 SR30: the market leading spectrally flat Class A pyranometer with heating and tilt sensor.



Introduction

Welcome to the next level in solar radiation monitoring! The all-digital heated SR30-M2-D1 offers the highest accuracy and highest data availability: it outperforms pyranometers equipped with traditional ventilation systems. After introduction in 2017, SR30 was rapidly recognised as the ideal instrument for use in PV system performance monitoring, and is increasingly used in meteorological networks as well.

SR30 is an ISO 9060 spectrally flat Class A pyranometer. It measures the solar radiation received by a plane surface, in W/m^2 , from a 180° field of view angle. SR30 offers many advantages over competing pyranometers.



Figure 3 SR30 is supplied with a DP01 dome protector.

Calibrated tilt angle measurement

SR30 includes a tilt sensor. This is very practical for remote checks of instrument installation. For PV systems with single-axis trackers, IEC 61724-1 Class A systems also require a tilt angle measurement.

The IEC suggested option to measure tilt by counting motor steps does not detect tracker faults, which is one of its purposes. Also counting steps will not lead to the required 1° accuracy (Clause 10.1). Every SR30 tilt sensor is individually calibrated and temperature compensated between -30 and $+50^\circ\text{C}$, resulting in a high accuracy of $< 1^\circ$.

Spectrally flat as required for PV monitoring and albedo

The ISO 9060 defines pyranometer classes A, B and C. The standard also defines a subclass, called "spectrally flat".

The vast majority of users need to use instruments of the spectrally flat subclass; only spectrally flat instruments measure with high accuracy, even when a cloud obscures the sun, or when the irradiance includes reflected radiation. These situations occur for example when you measure Global Horizontal Irradiance (GHI) under partly or fully cloudy skies, when you measure Plane of Array (POA), albedo or net-radiation.

Instruments just of class A, B or C, and not spectrally flat, only measure accurately under clear sky conditions. Using "spectrally flat" instruments is essential because this ensures:

- you can measure accurately not only horizontally under clear sky conditions, but also general GHI, POA, albedo and net radiation
- you comply with WMO requirements
- you can use the normal standardised ISO and WMO calibration procedures
- you can also separately measure the diffuse component only (creating a diffusometer) with a shadow ring or shading ball, using the same instrument model
- you can perform uncertainty evaluations with negligible (zero) spectral errors

Heated for high data availability

High data availability is attained by heating of the outer dome by ventilating air between the inner and outer dome. This space forms a closed circuit together with the instrument body; ventilated air is not in contact with ambient air. RVHTM -Recirculating Ventilation and Heating -technology, developed by InstruFiber, mitigates dew and frost and is as effective as traditional ventilation systems, without the maintenance hassle and large footprint. The instrument has 2 heating modes; normal at < 3 W, and medium at < 0.65 W power.

- low power consumption:
SR30-M2-D1 requires less than 3 W, compared to 10 W for traditional ventilation systems
- low maintenance:
SR30-M2-D1 does not require filter cleaning or replacement

The dome of the SR30 pyranometer is heated by ventilating the area between the inner and outer dome. RVHTM is much more efficient than traditional ventilation, where most of the heat is carried away with the ventilation air. Recirculating ventilation is as effective in suppressing dew and frost deposition at less than 3 W as traditional ventilation is at 10 W. RVHTM technology keeps domes and sensor in perfect thermal equilibrium, which also leads to a reduction of zero offsets.



Figure 4 Heated to counter frost and dew deposition: clear difference between a non-heated pyranometer (back) and SR30 with RVHTM technology (front).

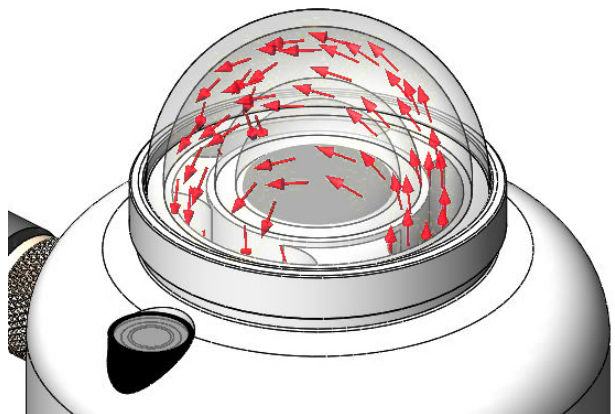


Figure 5 Heating: how it's done: recirculating ventilation and heating between the inner- and outer dome forming a closed circuit with the body is much more power-efficient than traditional ventilation systems.

Environmental impact

We analysed the environmental impact of SR30 by comparison to externally ventilated pyranometers (SR20 + VU01). SR30's impact is lower due to:

- lower power consumption during use
- lower transport volume when first installed and when recalibrated every 2 years

Take a look at [our environmental impact analysis](#). As a user reduce environmental impact by:

- nearby calibration, minimising transport
- power heaters only if needed



Remote sensor diagnostics

Besides solar irradiance, SR30 outputs sensor diagnostics, including:

- instrument temperature
- tilt angle
- internal ventilator speed (RPM)
- internal humidity
- heater current

Remote diagnostics reduces the need for (un)scheduled field inspections.

Liabilities covered: test certificates

As required by ISO 9060 for Class A classification, each SR30 is supplied with calibration and test results:

- sensitivity
- directional response
- temperature response
- tilt sensor response (0 to 90 °)

Diffuse radiation measurement

With its outstanding zero offset specification and the fact that it is spectrally flat, SR30 is also the instrument of choice for high-accuracy diffuse radiation measurement.

Operation in 3 power modes

Heater and ventilation may be remotely switched on and off. The instrument has 2 heating modes; normal at < 3 W, and medium at < 0.65 W

SR30-M2-D1 specifications

Measurand	hemispherical solar radiation
ISO classification	
ISO 9060:2018	spectrally flat Class A pyranometer
ISO 9060:1990	secondary standard pyranometer
WMO performance level	high quality pyranometer
IEC 61724-1 compliance	meets Class A PV monitoring system requirements for solar irradiance and tracker tilt angle measurements
Calibration uncertainty	< 1.2 % (k = 2)
Measurand	sensor tilt angle
Tilt measurement uncertainty	± 1 ° (0 to 90 ° tilt, -30 to + 50 °C)
Dome protector	included (model DP01)
Heating	included
Ventilation	included
Standard operating mode	heated and ventilated
Zero offset a	< 2 W/m ²
Calibration traceability	to WRR
Calibration certificate	included, content limited according to ISO/IEC 17025- 7.8.1.3.
Spectral range	(285 to 3000) x 10 ⁻⁹ m
Rated operating temperature range	-40 to +80 °C
Temperature response	< ± 0.4 % (-30 to +50 °C)
Temperature response test of individual instrument	report included
Directional response test of individual instrument	report included to 95 °
Tilt sensor calibration of individual instrument	report included (0 to 90 ° tilt, -30 to + 50 °C)
Standard cable length	5 m (see options)
Rated operating voltage range	8 to 30 VDC

Operation in 3 power modes

Power consumption at 12 VDC	
Normal	< 3 W
Medium	< 0.65 W
Low	< 0.1 W

Digital communication

Digital output	- irradiance in W/m ² - instrument body temperature in °C - tilt angle in ° - internal humidity in % - ventilator speed in RPM
Communication protocol	Modbus
Hardware interface	2-wire (half duplex) RS-485

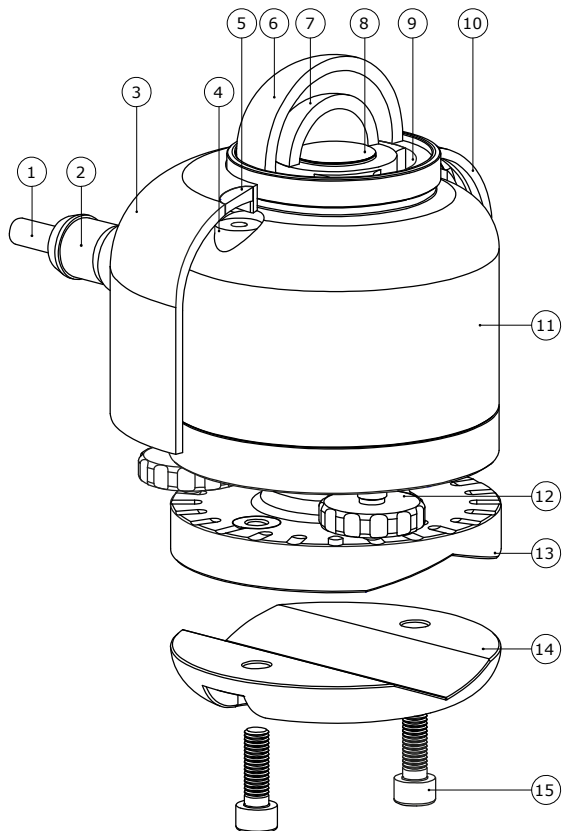


Figure 7 Overview of SR30: (1) cable, (2) connector, (3) sun screen, (4) bubble level, (5) bubble level window, (6) outer dome, (7) inner dome, (8) thermal sensor with black coating, (9) internal ventilation vents, (10) quick release system of sun screen, (11) instrument body, (12) levelling feet, (13) optional spring-loaded levelling mount, (14) optional tube mount, (15) screws included with tube mount.

Suggested use

- PV system performance monitoring
- scientific meteorological observations

Hukseflux Sensor Manager software

For communication between a PC and SR30, new Sensor Manager software can be downloaded. It allows the user to plot and export data, and change the SR30 Modbus address and communication settings. Also, the digital outputs may be viewed for sensor diagnostics.

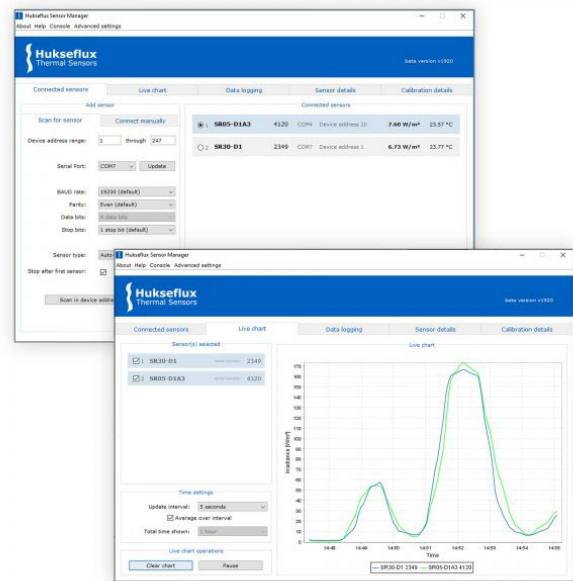


Figure 8 Improved Sensor Manager software allows the user to change the Modbus address and communication settings.

Options

- spring-loaded levelling; a practical mount for easy mounting, levelling and instrument exchange on flat surfaces (LM01)
- tube levelling mount with set of bolts (TLM01)
- longer cable; 10 and 20 metres
- calibration certificate including name and contact information of the customer
- DP01 dome protector set of 5 pieces
- AMF01 albedometer fixture
- PMF01 and PFM02 mounting fixtures



Figure 9 Optional spring-loaded levelling and tube mount for SR30. LM01 leveling mount (one part), TLM01 tube mounted (2 parts)



Figure 10 PMF01 pyranometer mounting fixture can be used for easy installation of a pyranometer in Plane of Array for PV system performance monitoring.

See also

- [SRA30 albedometer](#) consisting of two SR30's and an AMF01
- [SR05](#), an economical solution often used for monitoring small scale PV systems
- [PMF01](#) and [PFM02](#) mounting fixtures
- consult our [pyranometer selection guide](#)
- introduction of SR30 on [our YouTube channel](#)
- [environmental impact analysis of SR30](#)
- [why ventilate and heat pyranometers](#)
- view our complete [range of solar sensors](#)

About Hukseflux

Hukseflux is the leading expert in measurement of energy transfer. We design and manufacture sensors and measuring systems that support the energy transition. We are market leaders in solar radiation- and heat flux measurement.

Customers are served through the main office in the Netherlands, and locally owned representations in the USA, Brazil, India, China, Southeast Asia and Japan.



SR30 digital Class A pyranometer with heating and tilt sensor

After introduction in 2017, SR30 was rapidly recognised as the ideal instrument for use in PV system performance monitoring. It is now the market leading instrument for that application. SR30 is increasingly used for meteorological networks. Customers prefer Hukseflux pyranometers for their unsurpassed measurement accuracy and their lowest total cost of ownership.



Best compliance with standards

- first pyranometer to comply with IEC 61724-1 Class A requirements
- heated dome, Recirculating Ventilation and Heating (RVH™) technology
- calibrated tilt measurement, compliant with IEC 61724-1 requirements for pyranometer alignment with PV panels and measurement of single axis tracker tilt

Best paperwork

- all ISO required reports with every individual sensor
 - temperature response testing -30 to 50 °C
 - full directional response testing to 95°
- tilt sensor calibration (0 to 90° tilt, -30 to + 50 °C)



Best accuracy and data availability

- spectrally flat
- mitigates dew and frost
- lowest zero offsets
- no external ventilator required
- 3 power modes



Best diagnostics

- tilt angle
- humidity
- temperature
- ventilator speed (RPM)
- heater current



Tilt sensor and levelling

- remote check using on-board tilt sensor
- window for visible bubble level
- with optional spring-loaded levelling mount
- easy mounting, levelling and instrument exchange

Lowest total cost of ownership

- efficient worldwide calibration support
- dome protector reduces risk of damage
 - fast servicing organisation

